


## mPOS



## mPOS Flat

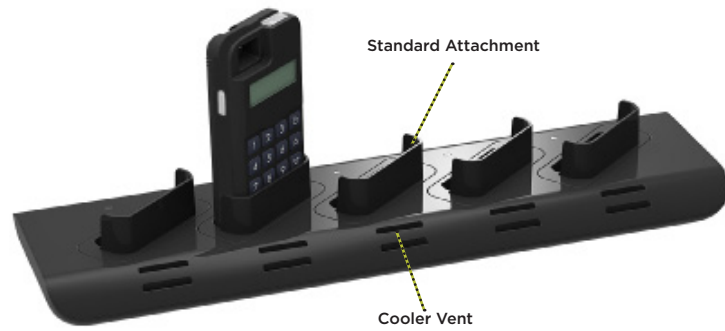


# Infinea® mPOS Charging Station (5-Unit)

### QUICK START GUIDE

## ASSEMBLY

- Place the Infinea mPOS Charging Station on a sturdy, clean and dry surface in an open, well-ventilated area away from direct sunlight.
- Insert the included AC adapter plug into the DC Jack Port on the charger. Then connect the AC power adapter to a power outlet.
- Insert the Infinea mPOS unit into a charging bay, ensuring that the battery contacts are aligned with the charging bay's contacts. The LED will light up to provide the charging status.

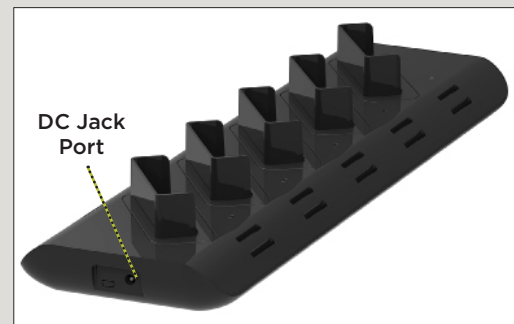

## CHARGE STATUS

The Infinea mPOS Charging Station uses LEDs to indicate the charge status.

Check the LED next to each charging bay to verify charging status, prior to use.

STATUS INDICATOR LEDS	
Green	Inserted device is fully charged.
Orange	Inserted device is charging.
Flashing Red	Over-current protection is enabled. Charging bay is at or above maximum fault current (1.9A) and has stopped working.
Solid Red	Over-current protection is enabled due to excessive temperature fault (over 60°C/140°F).
No LED	Indicates there is no device in charging bay or there is no power supply attached the charger.

**Note 1:** When the LED is solid red and the operating temperature has decreased to at or below 55°C/131°F, the charging bay will begin working again.

**Note 2:** No LED may also indicate over-current protection is enabled if the charging pins are shorted, or there is no load.

## TROUBLESHOOTING

**The LED does not come on when a unit is inserted.**

- Ensure that the power supply is securely inserted into both the power outlet and the DC port on the charging station
- Ensure the unit is properly seating in the charging bay

**It takes an excessive amount of time to fully charge the battery.**

- Verify ambient temperature meets the operating temperature requirements

**Operating:** 0°C - 40°C (32°F - 104°F)

