
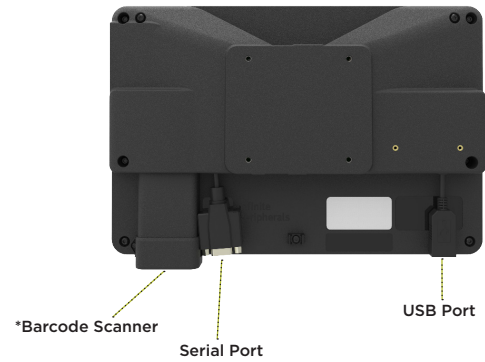



*Certain features may not be available on Scan only or Payment only models.

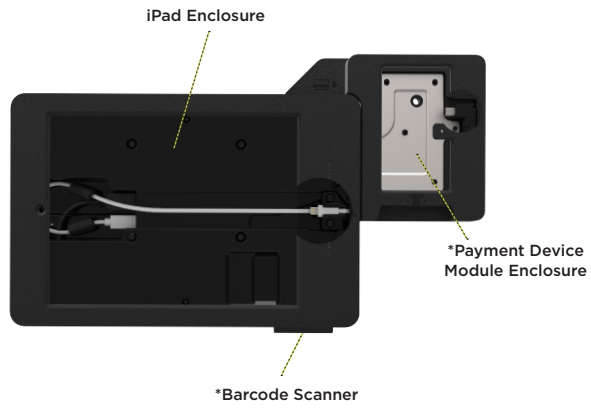

Omni One

Scan Only/Payment Only/ Scan & Payment

QUICK START GUIDE

ASSEMBLING THE OMNI ONE

1. Place the Omni One face down on a smooth, flat surface.
2. Remove the four (4) corner screws from the base unit using a Torx T20 screwdriver (or T8 for payment device). Place the screws in a secure area.
3. Turn the unit face up and detach the faceplate by sliding it to the left to unlock and gently pulling the top piece up and away from the base.
4. Insert the tablet into the base, by sliding it onto the Lightning™ connector until it clicks into place.
5. Place the top cover back onto the base of the unit and slide it to the right to lock it back into place.
6. Turn the unit over and insert the four (4) corner screws to the base. Secure them in place using the T20 screwdriver.

ATTACHING PERIPHERAL DEVICES

Suitable peripheral devices can be attached to the Omni One using one of the auxiliary ports on the back of the unit.

Note: Attach peripheral devices on the unit

USB Connector

1. Plug the USB cable into the USB interface on the back of the Omni One unit.
2. Connect the other end of the USB cable to a suitable peripheral device.

Serial Connector

1. Orient the serial interface cable properly, and then insert it into the serial interface connector on the back of the unit.
2. Secure the cable terminal by fastening the connector with the screws.
3. Connect the other end of the interface cable to an appropriate peripheral device.

POWERING ON THE OMNI ONE

1. Plug the power cable connector on your power adapter into the DC jack port on the back of the unit.
2. Connect the AC power cord plug into a suitable wall outlet.
3. Once the tablet is installed and the power supply is connected, the Omni One automatically powers on.

