

**QUICK START GUIDE**


# Infinea® Tab M

Barcode Scanner for iPad® mini




## Connect to Your iPad mini


1. Align the Home button on your iOS device with the half circle on the Infinea Tab M.

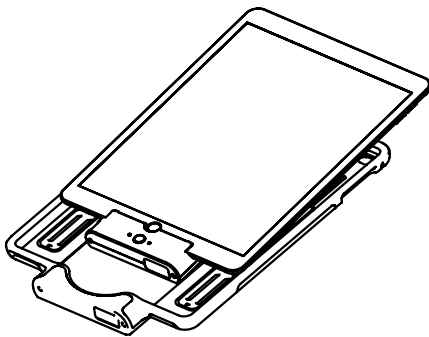

2. Gently slide the Infinea Tab M onto the Lightning™ connector.

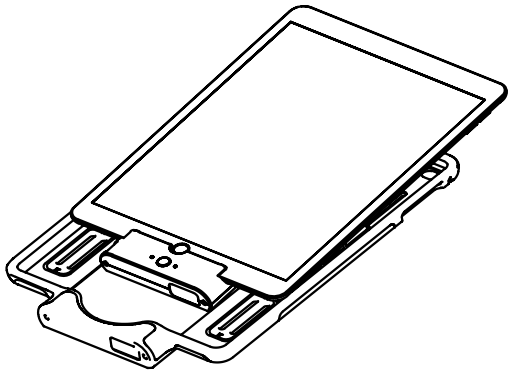


3. Ensure the iOS device is seated firmly.

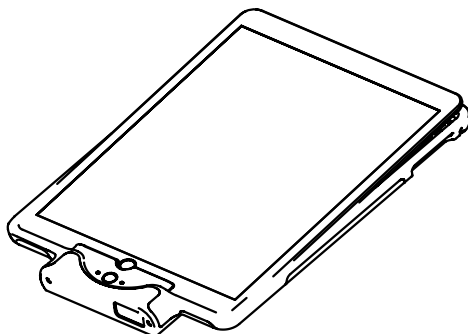

## Charge the Infinea Tab M

Before first use, ensure the battery is charged fully.

- Connect the mini USB charging cable into the USB port on the side of the unit.

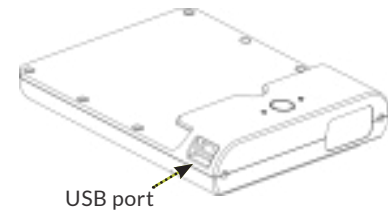

### Caution:

- Use only approved/recommended 5V, 2.1 amp DC adapters to charge the iOS device and Infinea Tab M together.
- Failure to do so may result in problems charging the unit and/or potentially damage the Infinea Tab M and/or iOS device.
- Do not force the plug into the connector when connecting the mini USB charging cable as it may damage the connector.

## Battery LED Status

LED	Description
Blue	Slow flashing—no active connection with the iOS application. Fast flashing—active connection with the iOS application.
Green	Flashing —battery is charging. Solid (no flashing)—battery is charged fully.

## Barcode Scanner

1. Activate the scanner by pressing the Scan button.
2. Position the scan head near the center of the barcode.
3. Ensure the pointer extends outside the edges of the barcode.
4. Slowly pull back the unit increasing the distance between the barcode and scan head until the scanner reads the entire barcode.



## Magnetic Strip Reader

1. Place a magnetic card with the stripe face down.
2. Insert the card into the card reader slot, and then swipe it quickly through until the data is read successfully.
3. Give the Infinea Tab M to the customer for PIN entry.

## Contactless Card Reader

1. Place the RFID tag/card over the receiver/transmitter as shown on the RFID label on the front of the unit.
2. Press the Reading RFID card button on the application. Data is sent from the reader to the iOS device.

## Troubleshooting

### The Infinea Tab M does not connect to the iOS device.

- Infinea Tab M not powered on, or battery is too low/fully discharged.
- The Infinea tab is not properly connected to the iOS device in the iOS settings menu.

### Scanner/RFID does not activate

- Infinea Tab M not powered on, or battery is too low/fully discharged.
- Faulty scan engine/RFID reader.

## Product Returns

Use the link in step 1 to create an account and gain access to our Knowledge Base and online support services. Through our online support center, you'll be able to download files, open a Support Ticket, manage your RMAs, view your account Profile and subscribe to Alerts.

### To request a RMA

1. Create a user account in the RMA Support Portal at <http://ipcmobile.com/support/rma/>
2. Login to your user account, and then click Create RMA Request.
3. Read the instructions provided and complete the online request form.
4. Note the assigned RMA number and write it clearly on your shipping carton.
5. Ship your equipment to us using the address provided.

## Warnings & Cautions

Please observe the following precautions:

- Keep the unit away from liquids. Do not immerse in water.
- The unit is intended for indoor use only. When not in use, place it in a cool, dry place.
- Do not place the unit near a heat source. Keep both the power supply and unit away from direct sunlight and/or heat.
- Units should only be repaired by Infinite Peripherals.

## Warranty

Infinite Peripherals does not warrant, and is not responsible for, any damage to the Infinea Tab M ("Product") as a result of liquid or solid particle intrusion into the Product or damage caused by dropping the Product. If a material or workmanship defect arises with regard to any Infinite Peripherals product, and a valid claim is received within the Warranty Period, Infinite Peripherals (at Infinite Peripherals' sole discretion) will (1) repair the Product using new or refurbished parts, or (2) replace the Product with a new or refurbished Product. For purposes of this limited warranty, "refurbished" means a product or part that has been substantially returned to its original specifications. In the event of a defect, these are your exclusive remedies.

### Note:

Box contents and part numbers may vary based on your order configuration.

## Accessories & Additional Information

Contact your Infinite Peripherals sales representative for technical specifications and additional product documentation. For current and future offerings, visit our website, [ipcmobile.com](http://ipcmobile.com), or contact your Infinite Peripherals account representative for complete details.

### Note:

The iOS device and any other additional items shown may not be included.

## Contact Information

### Mobility Sales/ Technical Support Center

Infinite Peripherals, Inc.

17681 Mitchell N

Irvine, CA 92614

Toll-Free: (866) 278-7860

Office: (949) 222-0300

Email: [info@ipcmobile.com](mailto:info@ipcmobile.com)

Website: [ipcmobile.com](http://ipcmobile.com)

### Headquarters/ Main Warehouse

Infinite Peripherals, Inc.

2312 Touhy Avenue

Elk Grove Village, IL 60007

Toll-Free: (800) 278-7860

Office: (847) 818-1260

Fax: (847) 818-1287